



NINGBO JINGYE SAFE DEPOSIT BOX

The one you can trust

NINGBO JINGYE Profile

MORE SAFE

HIGH QUALITY

ACCEPT CUSTOMIZATION

Company Profile

Ningbo Jingye Safe Deposit Box Co. Ltd. was established in 1995 , we are one of the earliest manufacturer of Safe deposit box, mainly engages in R&D, production and sales of safety and security equipment such as Bank safe deposit boxes, Dense Cabinets, Vault doors, Banking Vaults, Safety doors, Locks. Located in Ningbo city, a beautiful city with sea port, we have transportation advantages.

We are quipped with world-class laser cutting machine, CNC punching machine, CNC bending machine and automatic spraying equipment. Our annual production capacity is over 1200 vault doors, 1000 sets of dense carbinets, safekeeping boxes over 150000 boxes.



Company Profile

NINGBO JINGYE SAFE DEPOSIT BOX
The one you can trust

- Established on : 1995
- Factory footprint : Approximately 21668 square meters
- Registered capital : 50 million RMB
- Corporate Honors : National High-tech Enterprise
- Number of employees : There are currently about 150 employees



- Integrity is the primary productive force
- Wholeheartedly serving customers, Mission Must Be Achieved
- More safe, High quality, Accept customization
- Focus、 Professional、 LEAN、 Refinement、 Co-Create、 Win Win



Main Sales Markets

NINGBO JINGYE SAFE DEPOSIT BOX
The one you can trust





Technical Description of Manual Dense Rack

1. Load capacity of each layer of dense shelves: The uniform load on each layer of shelves shall not be less than 100kg. After unloading for 24 hours, there shall be no cracks or permanent deformation.
2. The comprehensive self weight of each dense rack shall not be less than 60KG.
3. The comprehensive load capacity of each dense rack shall not be less than 480KG.
4. Material thickness: (The manual dense rack is made of high-quality domestic steel plates)

Column: 1.2mm

Hanging board: 0.8mm

Guard board: 0.8mm

Door panel: 0.8mm

Chassis: 2.5mm

Ground rail box: 2.5mm


Track square steel 20 * 20mm

Specification of dense rack: 900 * 510 * 2300 mm. Dense shelves with a height of 2300mm, standard 6-layer shelves

PRODUCT
2024

NINGBO JINGYE SAFE DEPOSIT BOX
The one you can trust


SAFE DEPOSIT BOX

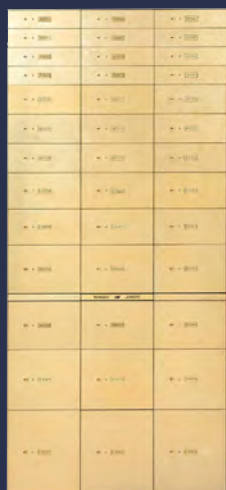

VAULT



VAULT DOOR

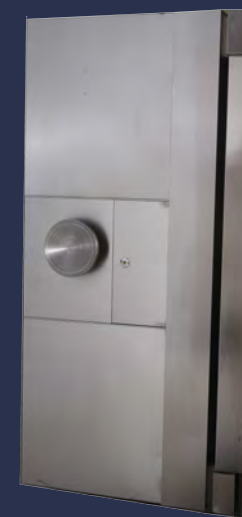



Safe Deposit Box

NEW MODEL

Used for Bank, Building, Security Company

Parameter specification

Box: Made of 1.5mm thick high-quality cold-rolled steel plate, electrostatically sprayed

Door panel: The main body is made of 8mm aluminum plate, and the panel is made of 1mm thick SUS304 plate ;

Hinge: outer and inner hinge available

Inner box: Made of 0.7mm thick high-quality cold-rolled steel plate, electrostatically sprayed ;


Lock: Adopting UL double head mechanical lock ;

Pull plate, side plate, base available

Stype	Model	Spe (mm) :H*W*D		Unit	Q'ty
		Box	Inner Box		
Safe deposit box	T42	74*136*610	66*92*540	Door	84
	T21	74*272*610	66*230*540	Door	42
	T12	132*272*610	123*230*540	Door	24
	T06	266*272*610	250*230*540	Door	12
	Total			Door	162



Safe Deposit Box

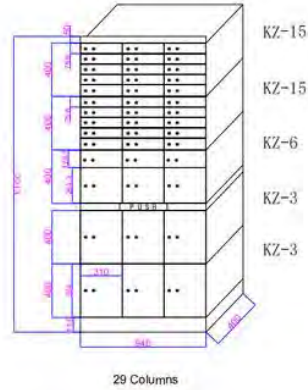

DIMENSION OF BOXES			
Model	Opening size	Module QTY	TOTAL
KZ-15	750*310*400	06	870
KZ-6(15)	128*310*400	29	87
KZ-3	261*310*400	29	87
KZ-3	384*310*400	58	178
	Total		1838



Parameter Specification

- ① Door material :10mm thick 304 stainless steel
- ② Cabinet: 2mm thick steel plate for outer frame, 1.5mm thick steel plate for partition plate
- ③ Inner box :0.7mm thick steel
- ④ Cabinet body surface treatment: sprayed plastic powder:black
- ⑤ Internal hinge
- ⑥ Engraved door number
- ⑦ UL listed dual key lock



Parameter specification

Material: Cold Steel outside and inside, filled by fireproof material and concrete material In middle layer

Color: Stainless steel, other color available, can be customization

Lock: mechanical lock, fingerprint lock, face recognition lock combination

Fingerprint lock Is optional

Size: 1400W*1000D*2200H

Safety level: Grade C

Anti-Burglary time: 60 minute

Movable bolts: Pillar

Function: moisture-proof, anti-drilling, anti-cutting, fireproof, bulletproof, explosion-proof

Surface finish: Electrostatic powder spraying

Weight: About 1800 KGs, Subject to physical object

Shelving available inside box

With Handle to open and close door

All box have no wire and electronic parts.

Application Home Hotel Office Bank

Mobile Vault

Hot sell MODEL

ALL OF OTHER MODEL CAN BE CUSTOMIZED



Vault door

Hot sell

Product selling points

Product Name: Stainless Steel Vault

Safety Level: Grade C

Movable bolts Pillar

Anti-Burglary time : 60 minute

Open Open in the Left side

Hand wheel: Stainless round wheel

Material: high quality solid steel/ stainless steel plate

Inner fence door is optional

Water proof: Optional

Outside frame size: 2100W*1100D mm

Emergency door: Optional

net access size: Optional

Installation door hole size: Custom size

Steel Thickness of door board :12mm

Thickness for the door: 240mmthickness

Lockset 2 pcs S&G mechanical lock

Color normally stainless steel color, can custmozie other colors

Allocation a handle and a handle wheeling, a small hidden door outside

MOQ: 1 pc

Delivery Details 25 to 30 workdays after confirming the order

Structure

Door leaf structure from outside to inside is the following: 1.5mm thick stainless steel plate (SUS304) +12mm thick steel plate+/120mm fireproof, moisture-proof anti-drilling and anti-cutting composite layer (anti-drilling and anti-cutting alloy + quartz + high standard C50 + custom steel ball + spring + perlite)+2 mm thick steel plate+1.5mm thick stainless steel plate (SUS304).


Factory showing



Factory gate



Office building

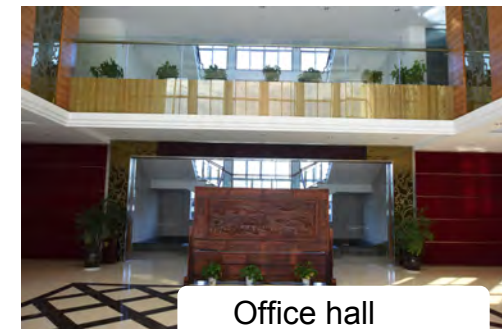


Office hall



Showing room



Work shop

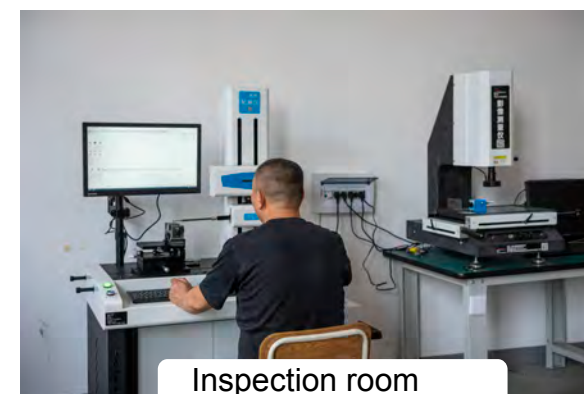

Inspection room

Production equipment



NINGBO JINGYE SAFE DEPOSIT BOX

The one you can trust

Contact & cooperation

NINGBO JINGYE SAFE DEPOSIT BOX CO.,LTD.

Contact: Jie Chen

Job title: sales director

M.P. : +8615757419961 (whatsapp)

Tel. : +86-13184332780

Email : jay@nbingye.com

URL : www.nbjingyesafe.com

Add : Dinghai road 118, Yinzhou, Ningbo, China